

Fig 1a

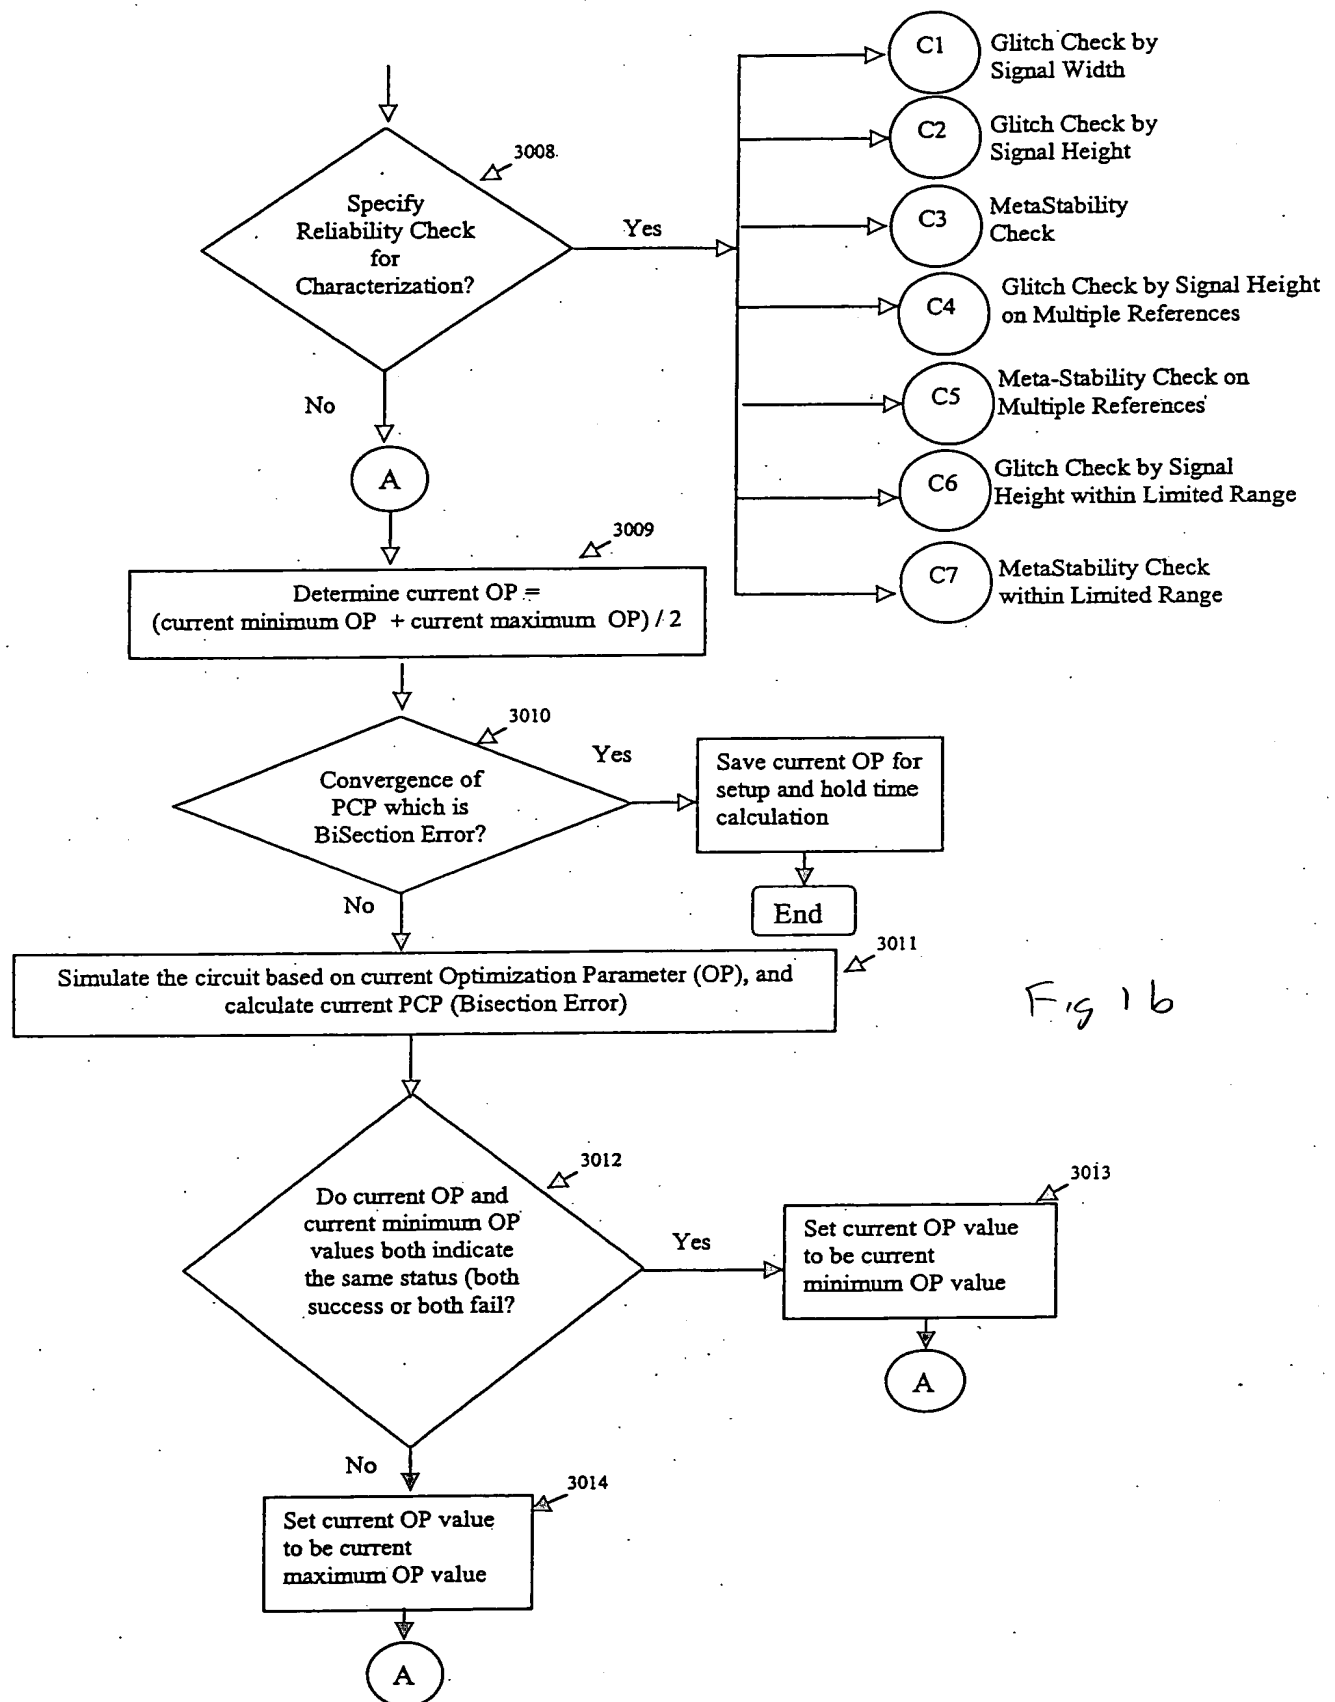


Fig 16





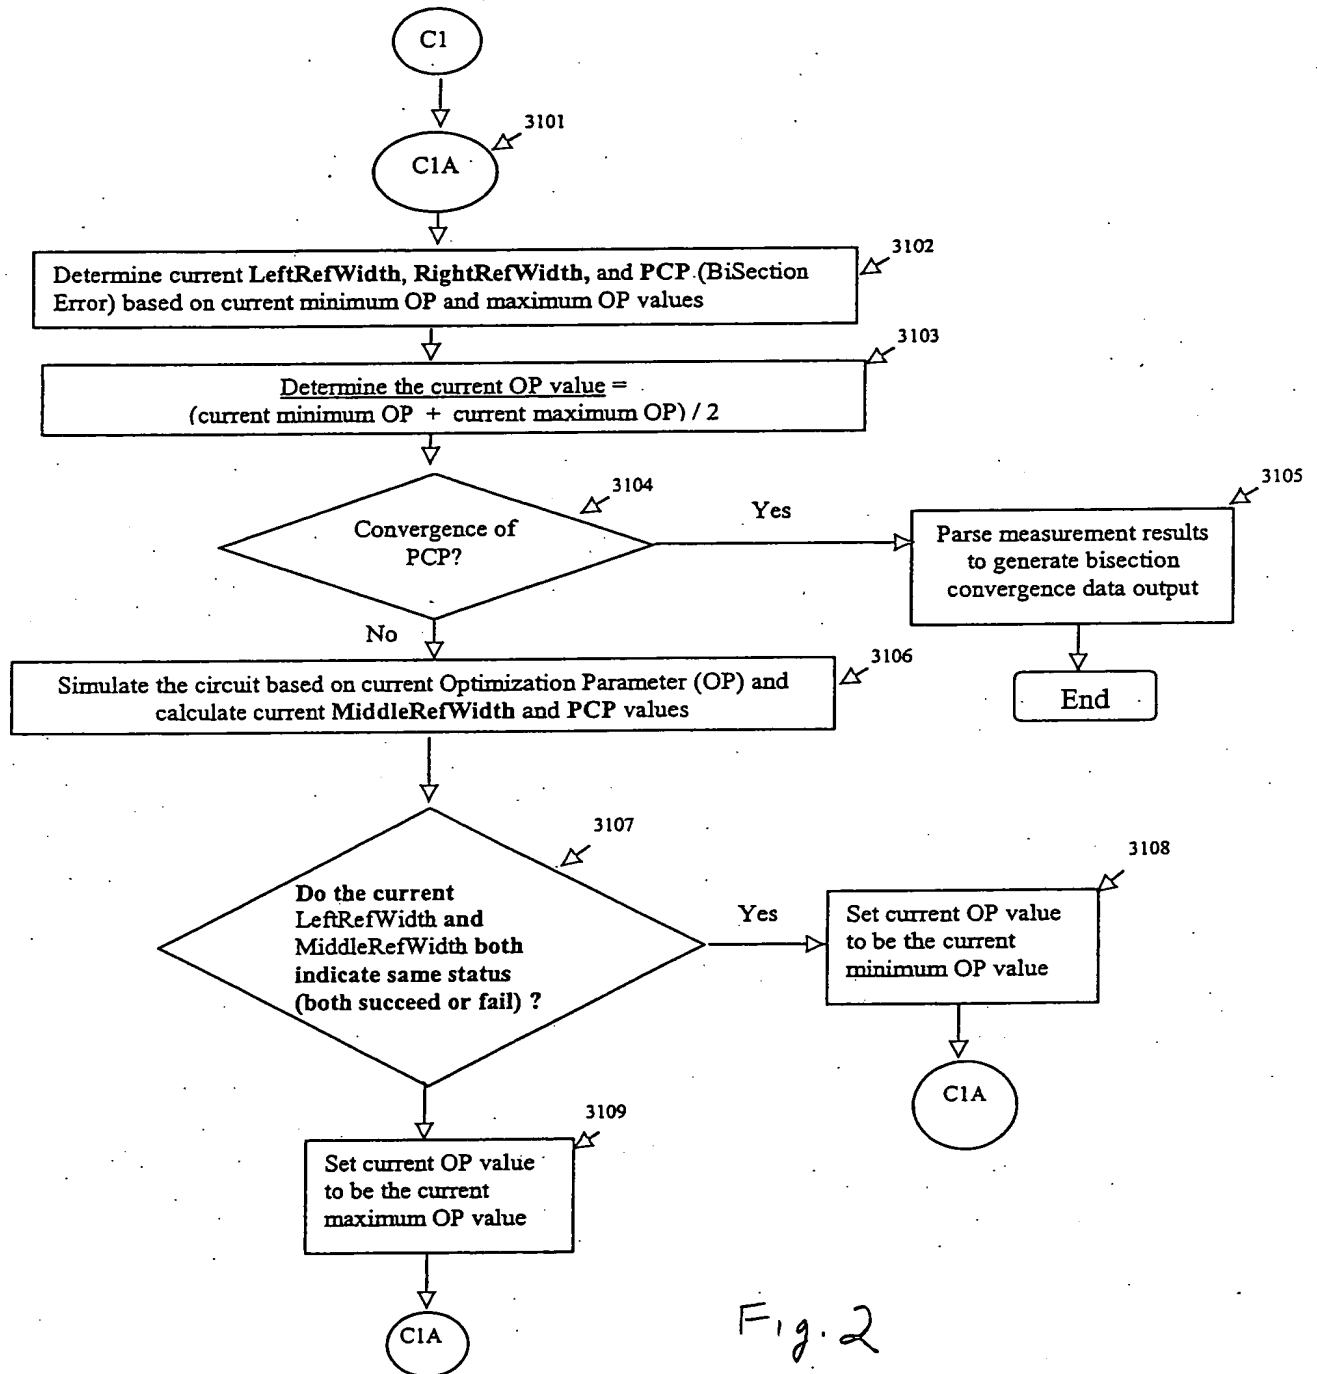


Fig. 2

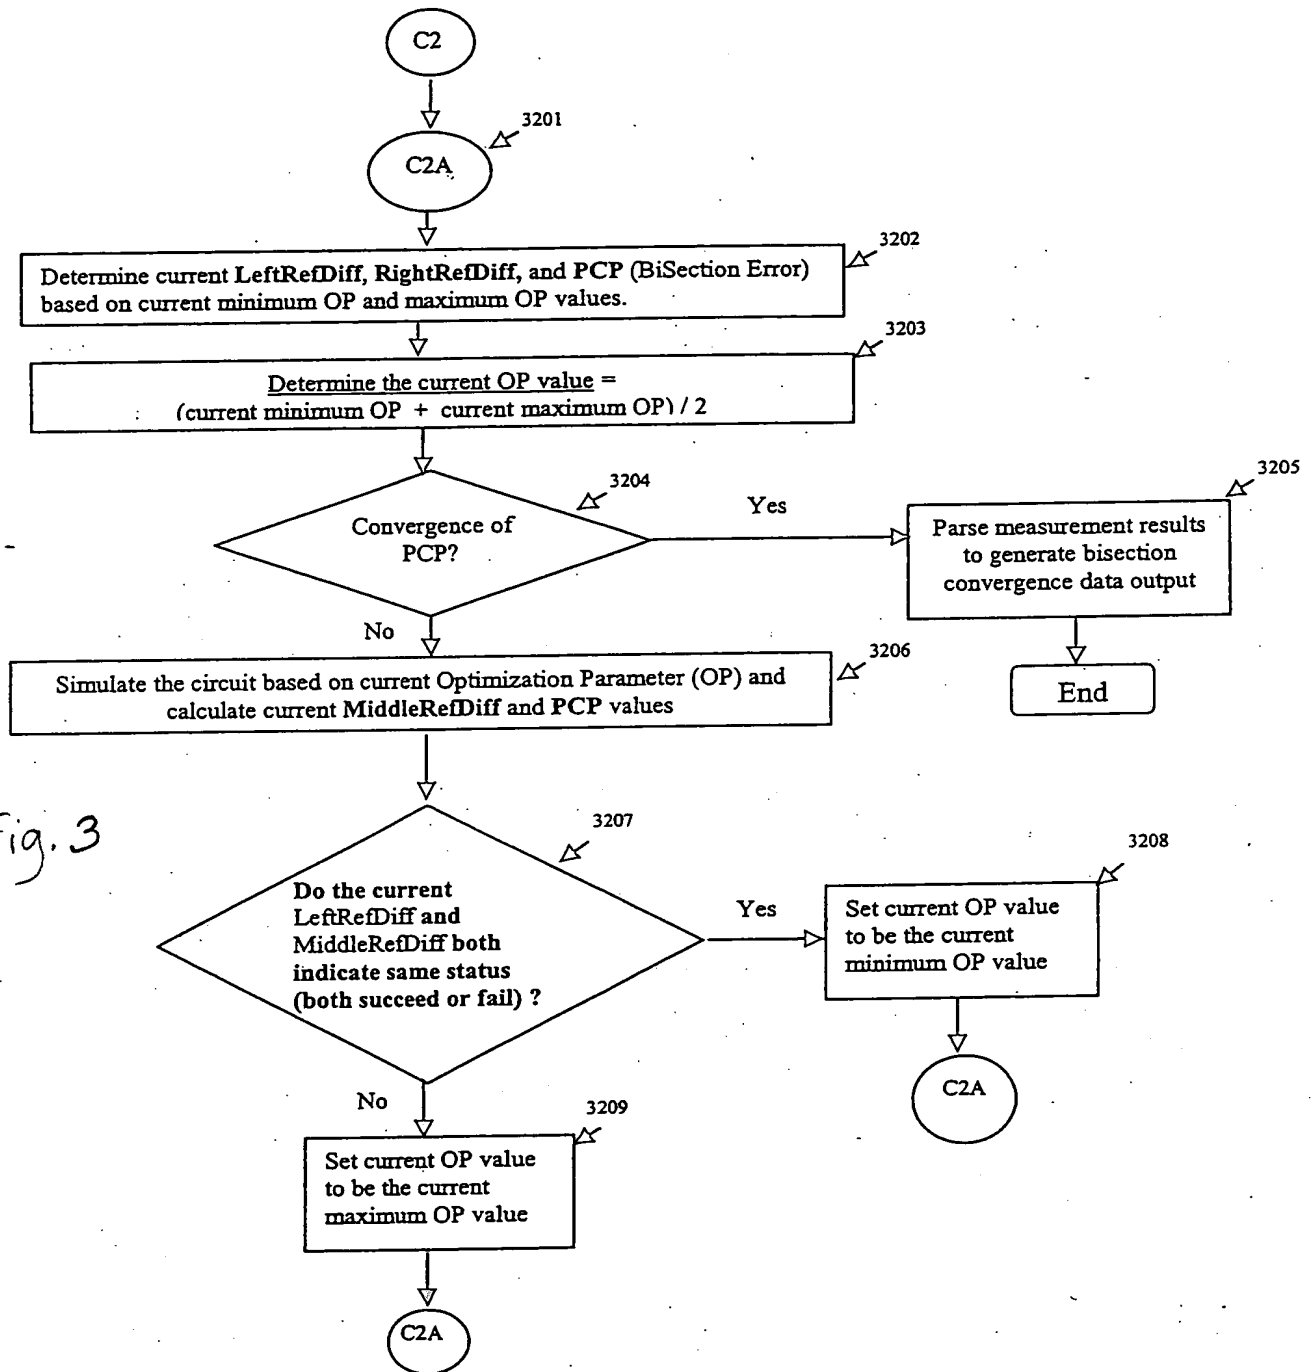


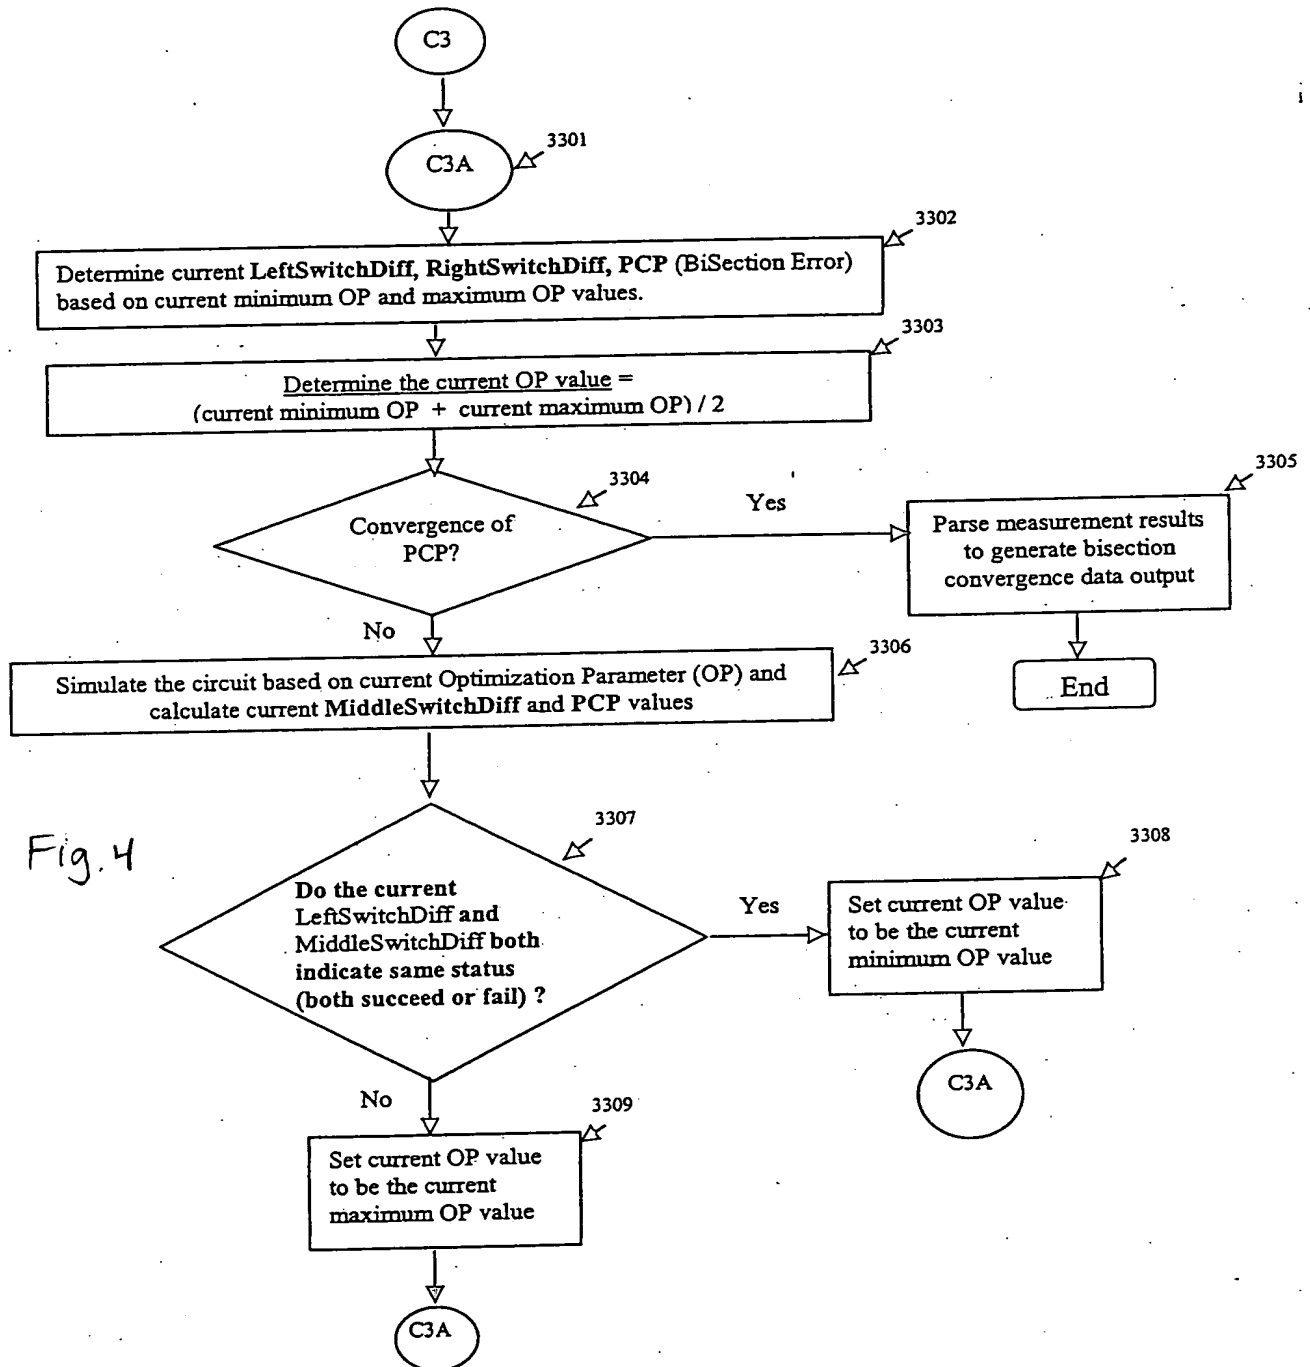

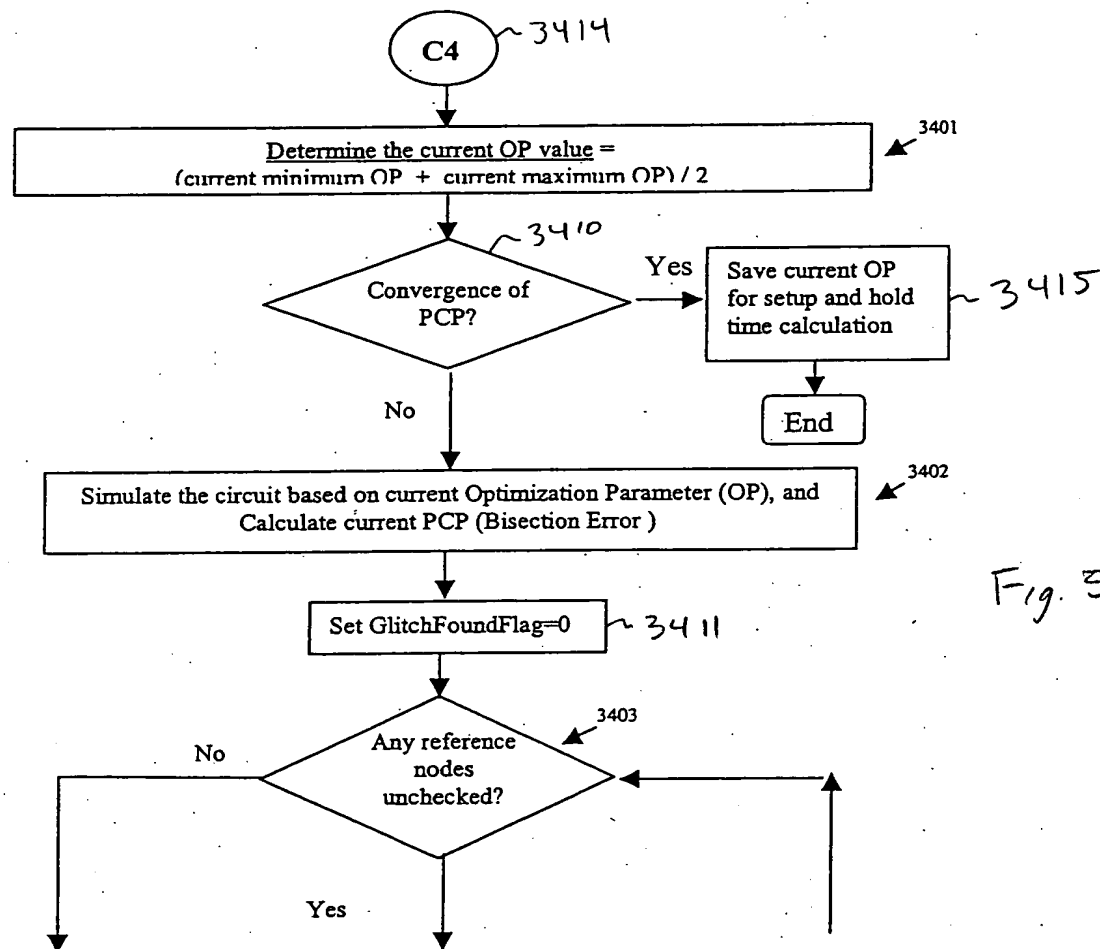

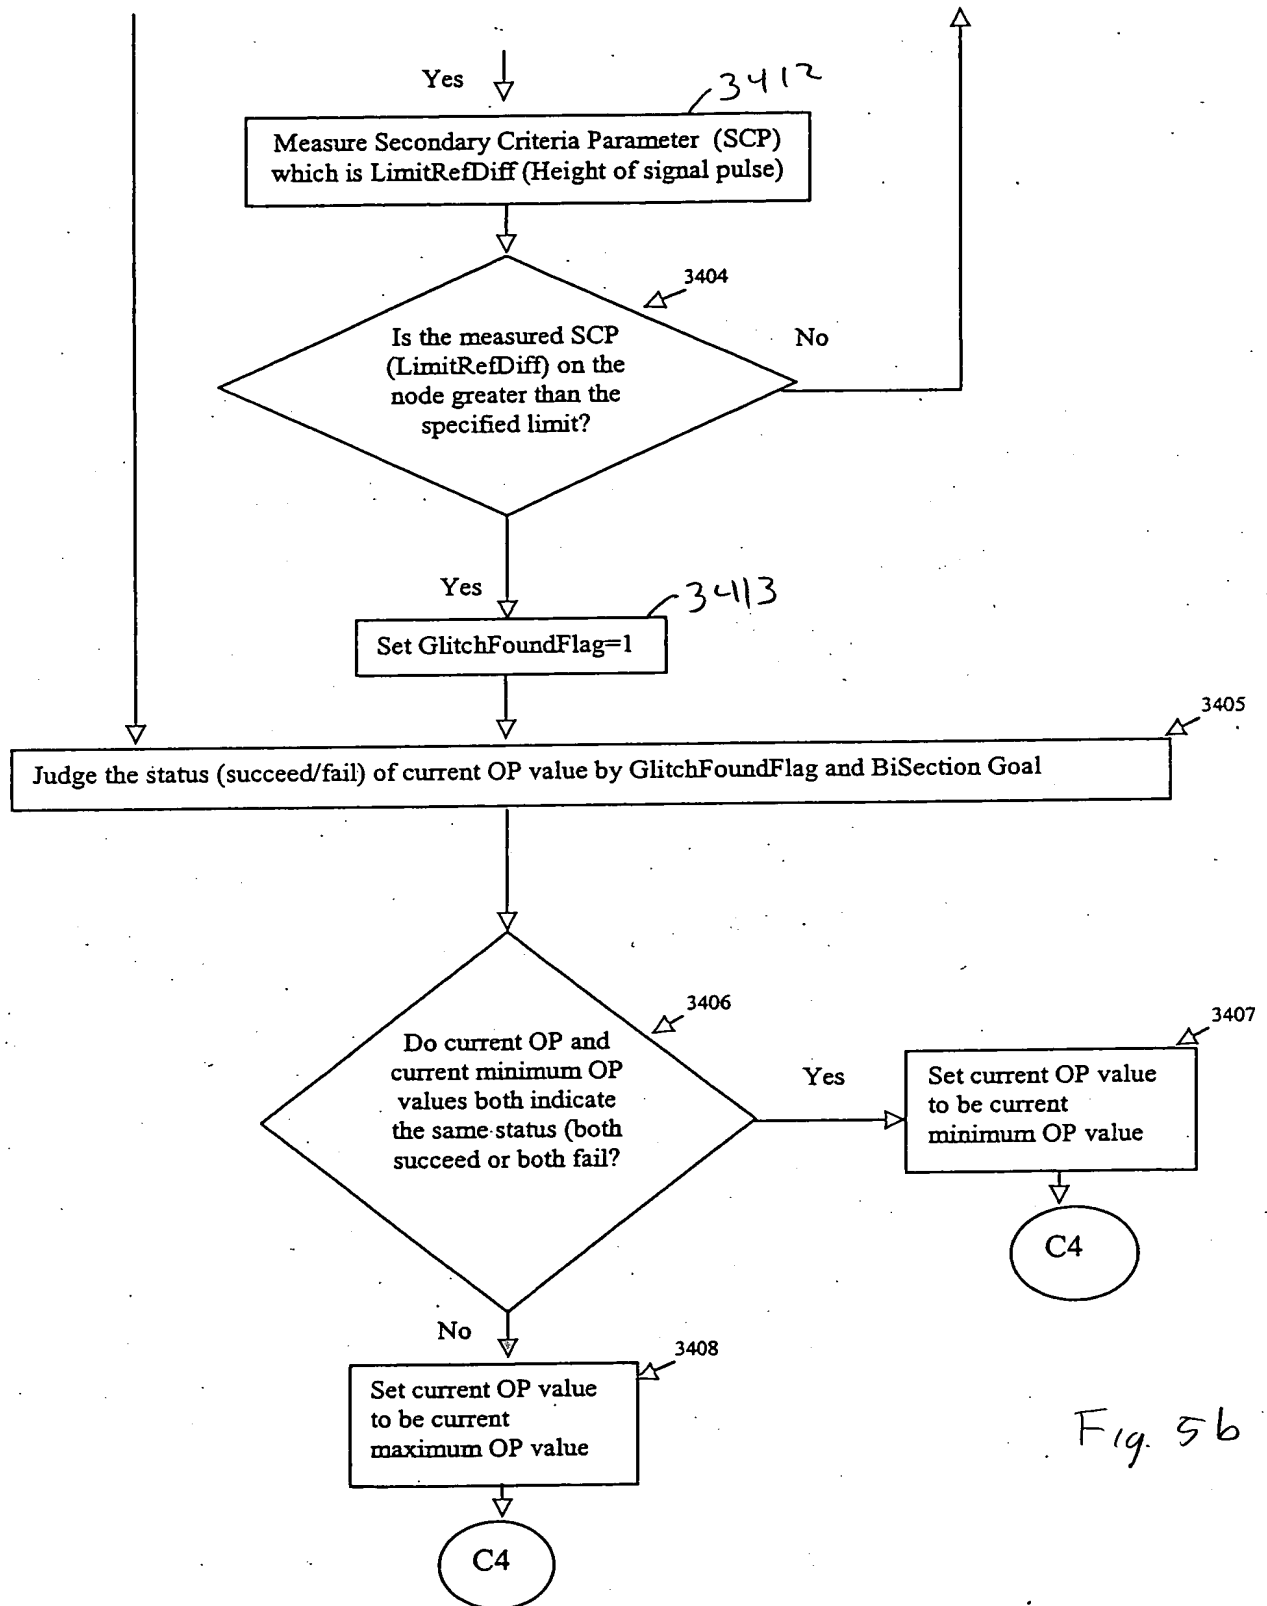

Optimization Parameter (OP): Setup Time or Hold Time  
Prime Criteria Parameter (PCP): Bisection Error  
Secondary Criteria Parameter (SCP): Meta-Stable Time which  
is the time that signal stays in a narrow voltage range (e.g.  
0.3\*VDD and 0.7\*VDD) during the transition.

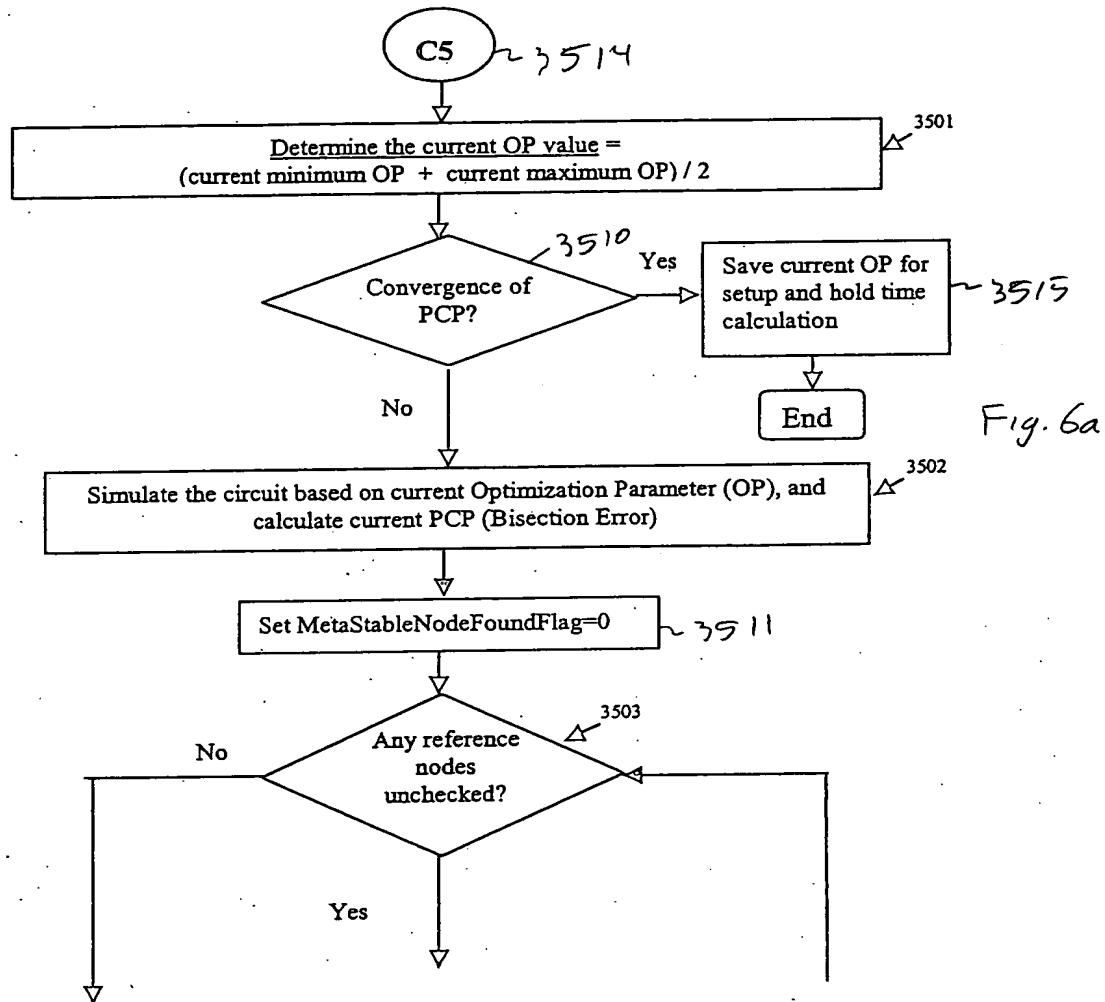



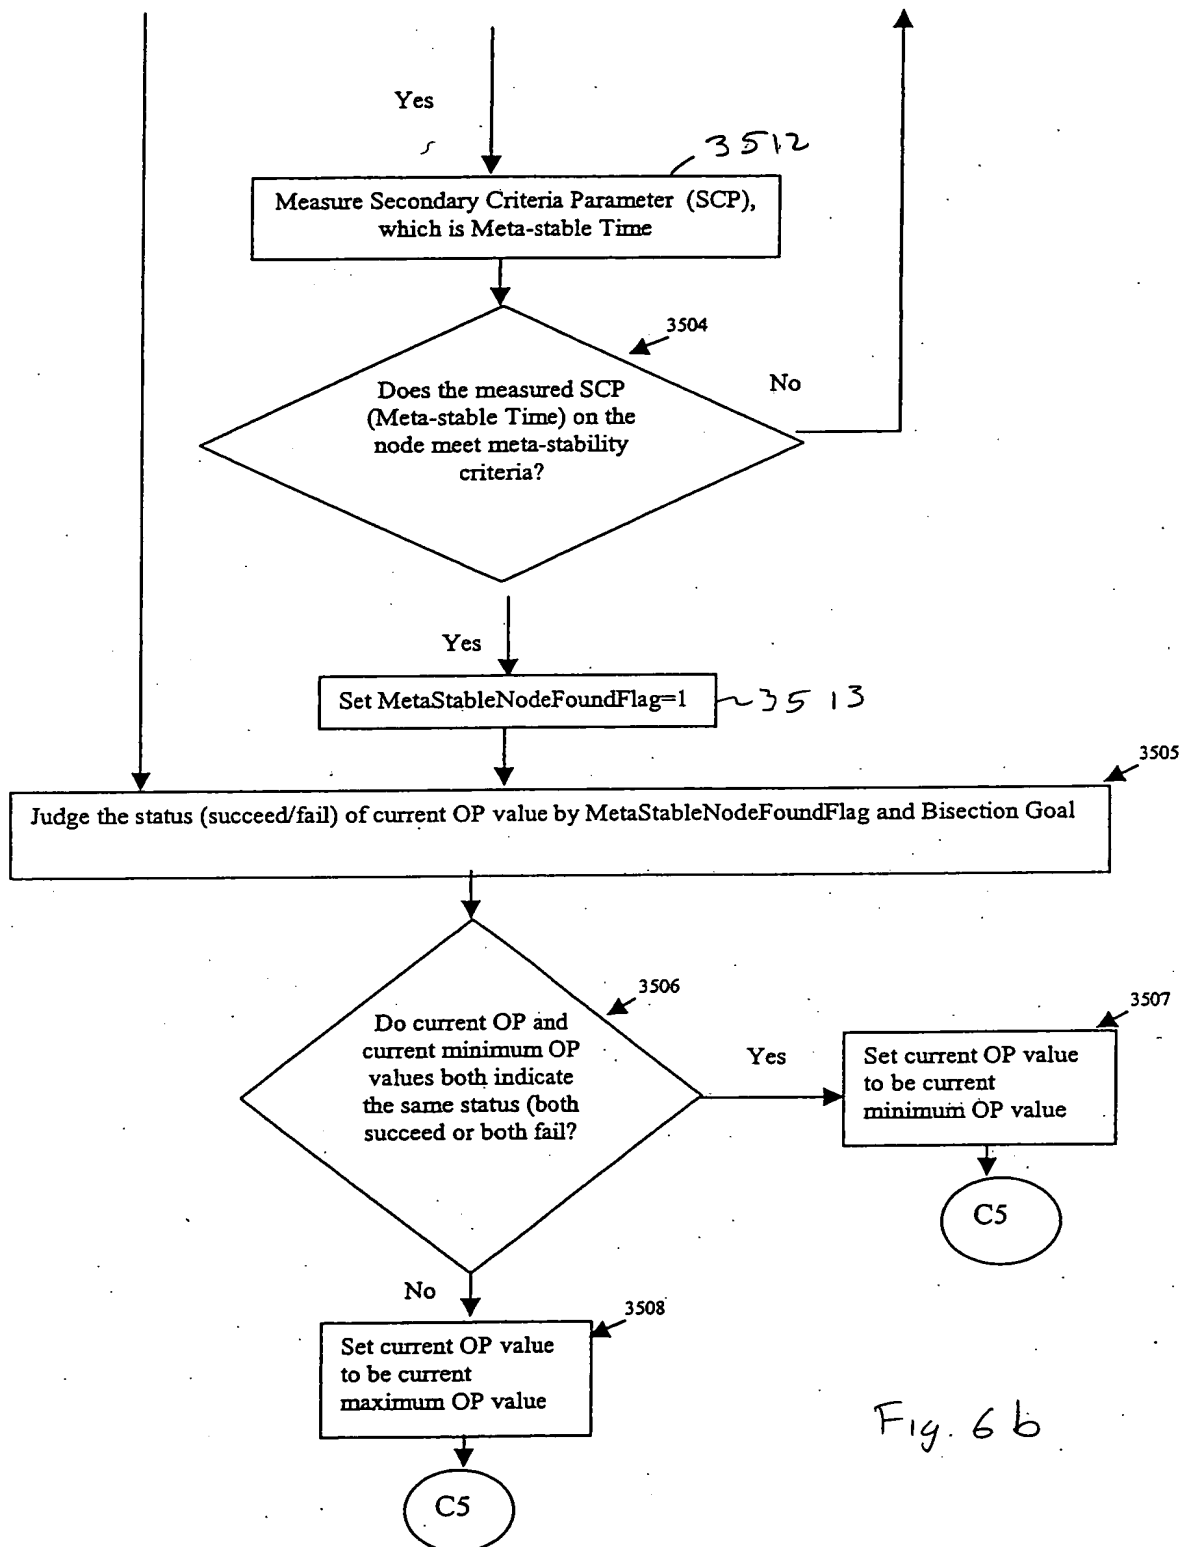
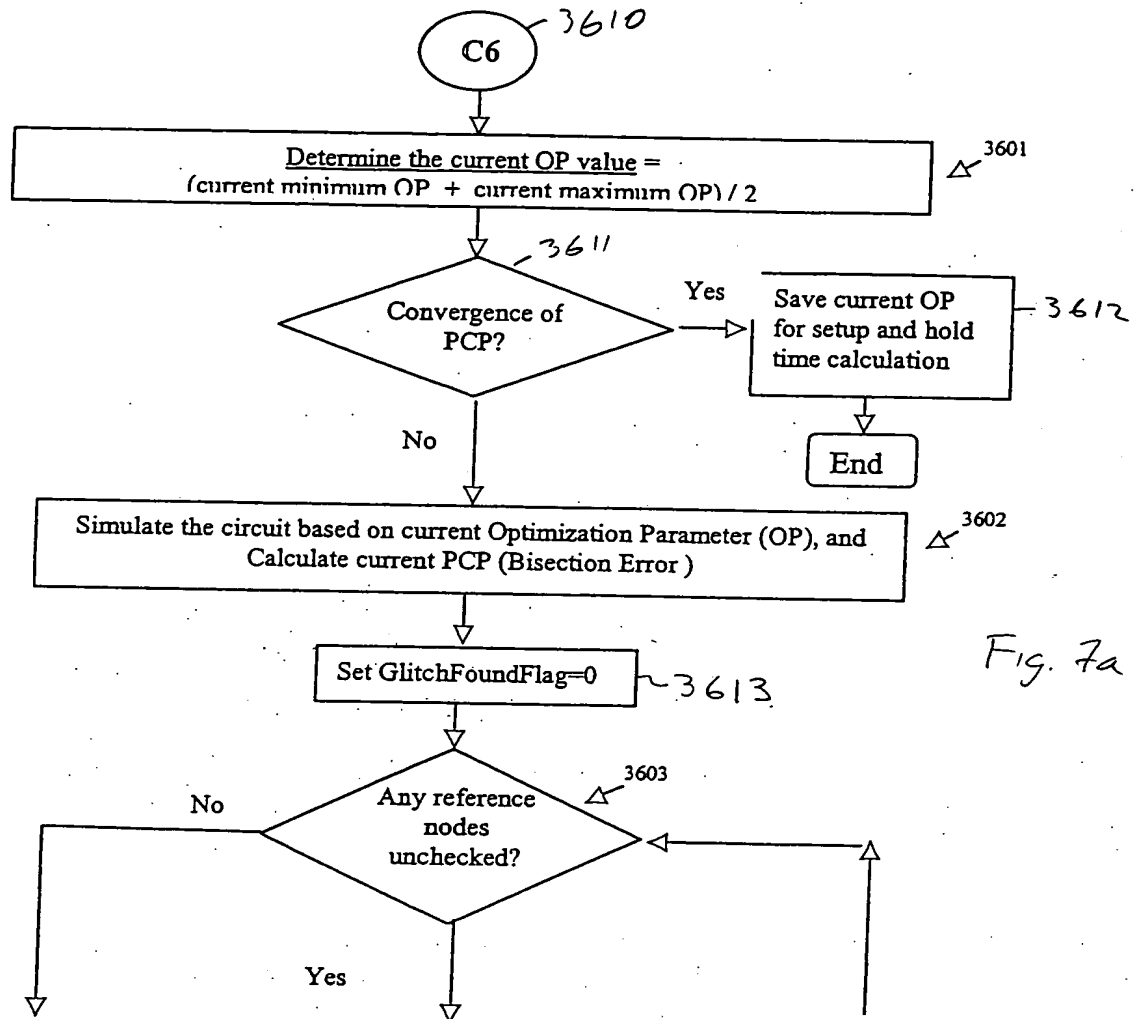


Fig. 6b



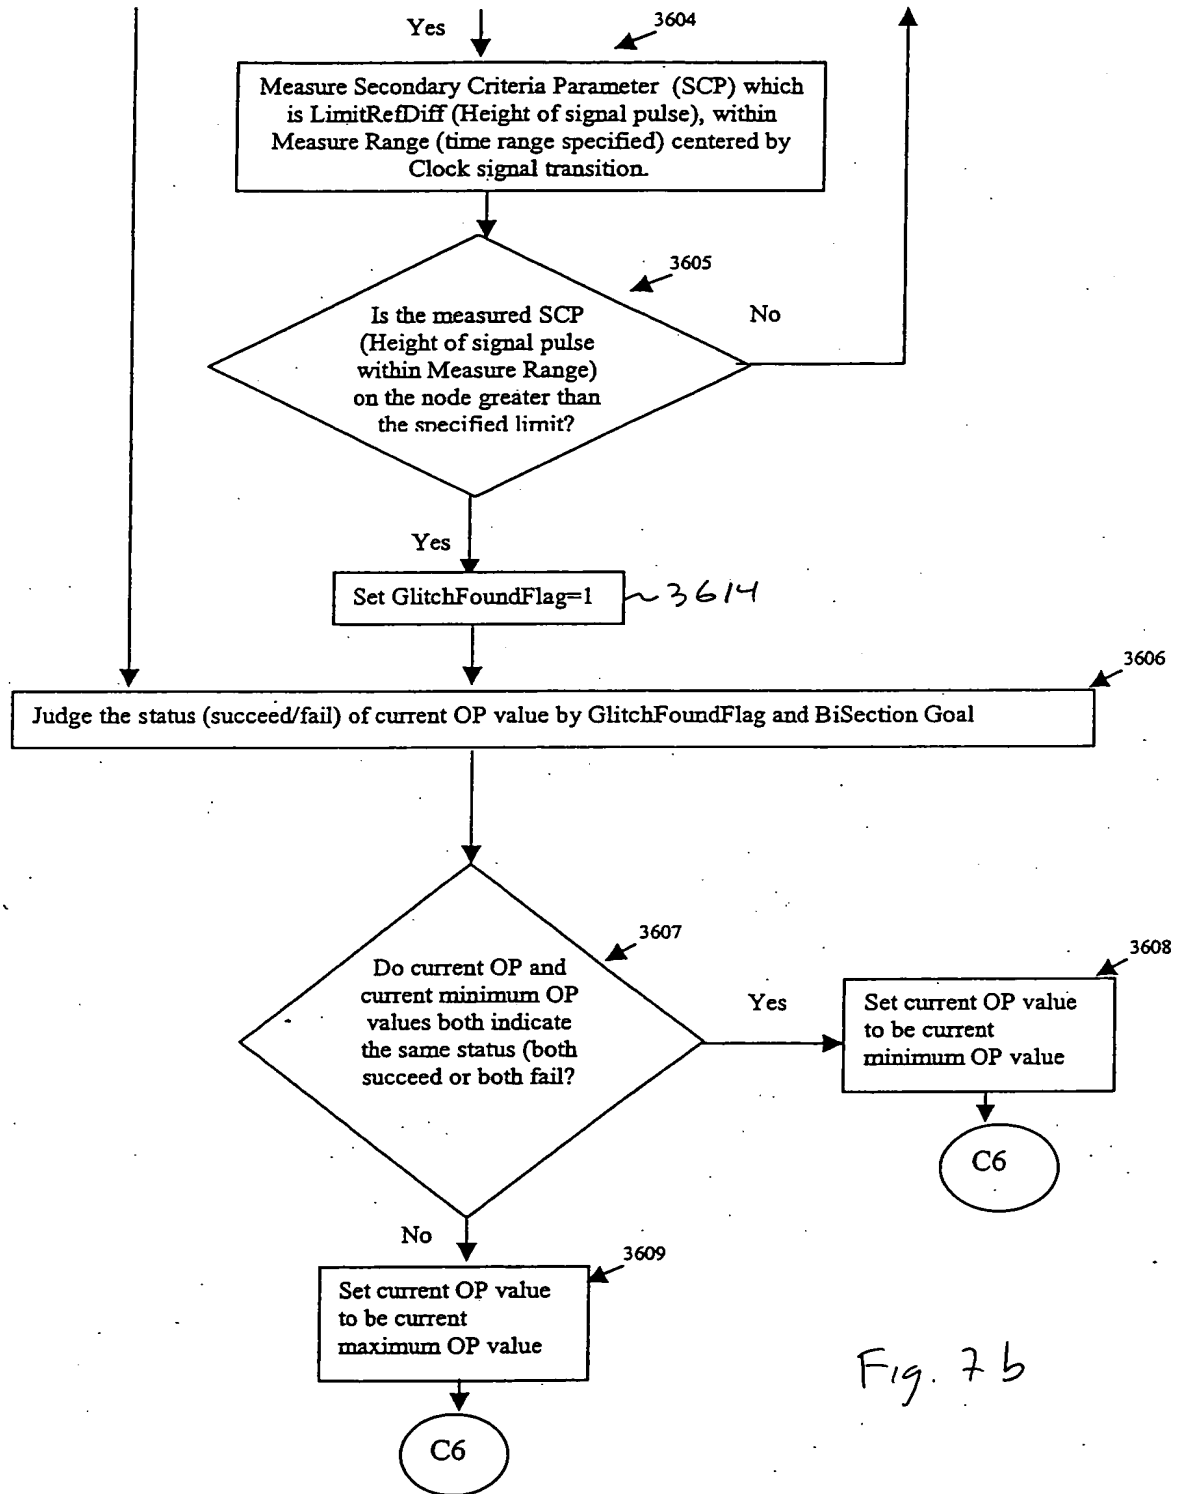


Fig. 7b

